

Custom contour seals tight and Python ventilates between the ribs.

# LP2 Ridge Vent

Python Venting Material

Custom contours

- Lower, custom-fit profile
- Moisture and pest barrier
- Non-obtrusive appearance
- Reduces utility costs
- One-person installation

WEATHER-TITE™ LP2™ RIDGE VENT is made from non-fabric-covered Python™ vent material. This strong, durable, modified polyester is a non-woven, non-wicking, fiber-based matting. Its specially cut contours are designed to provide a custom, low-profile fit for any pitch and most major metal roof profiles. LP2™ provides a superior net free ventilation area that still helps keep out moisture, pests and dust.

Plus, LP2™ can be installed by just one person in two steps. In fact, the screw bed and industrial strength peel and stick adhesive pre-applied to LP2™ makes this one of the easiest installations imaginable.

The patented LP2™ system improves ventilation, eliminates condensation, and is easy to install...at a cost lower than traditional fans and louvers.

Eco-friendly, invisible ridge vent made from durable polyester fiber. Custom contours allow it to fit with most all major metal roofing profiles and pitches.

40  
YEAR  
WARRANTY



Made with  
Recycled Material

KEEP ENERGY  
BILLS LOW  
ENERGY EFFICIENT PRODUCT




One element of the Marco WEATHER-TITE™ SYSTEM

U.S. Patent Number 7,594,363; Second U.S. Patent Number 8,024,897 issued 09/27/11; Canadian Patent Number 2,503,414



Simply remove the peel and stick strips to apply LP2



Install material, secure the ridge cap over the LP2 with fasteners or nails


**For easy installation, don't forget to order...**

**MASTIX**



**Butyl Tape**

**QUIKGRIP**  
Metal to Wood



**QUIKDRILL**  
Metal to Metal

## Specification Data

Net Free Area .....Varies with profile based on 17 square inches per Linear Foot of ventilation material

Dimensions vary

Air Permeability.....>>760 Cubic Feet per minute

Cold Cracking.....-25° F

Snow Infiltration .....0


Tear & Tensile Strength..... Machine 25 ppi / Counter 25 ppi

Compressive Strength..... 1.8 psi @ 75%

Abrasion.....No Damage 100 mph Wind-driven

Rain .....No Leakage

## The Expanding Marco Weather-Tite™ System

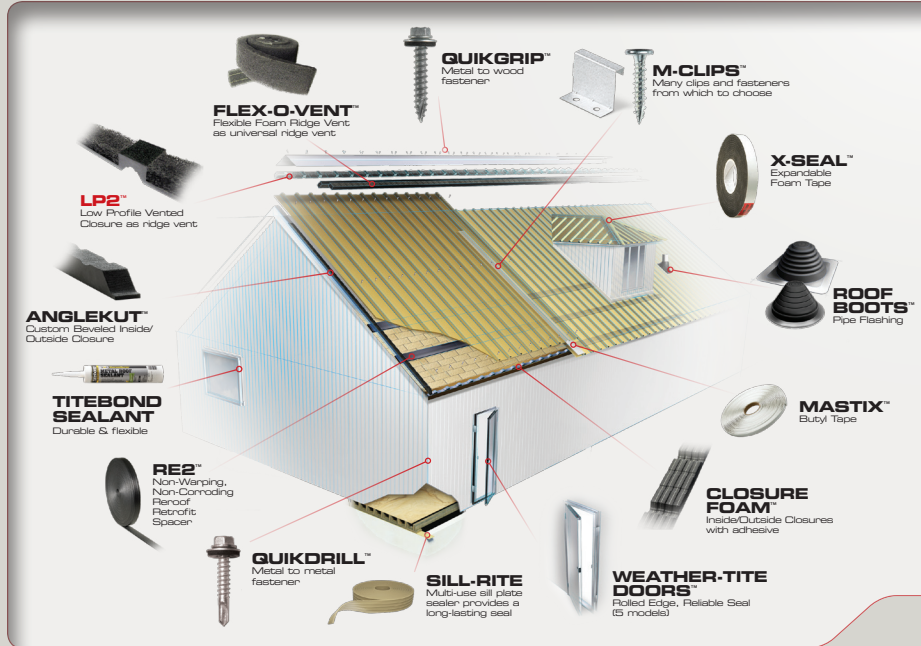

LP2 represents yet another Marco Industries technological development in bringing you innovative, higher quality, and more economical products for the building industry.



To order: 1.800.800.8590 | [MarcoIndustries.com](http://MarcoIndustries.com) | [info@MarcoIndustries.com](mailto:info@MarcoIndustries.com)



Marco Industries Corporate: 9410 E. 54th Street | Tulsa, OK 74145 | 1.800.800.8590 | Fax: 1.918.622.4536  
 Marco Industries Canada: 1632 Broder Street | Regina, Sask S4N 7K1 | 1.866.244.7573 | Fax: 1.306.775.0072